



CanBus Controller unit

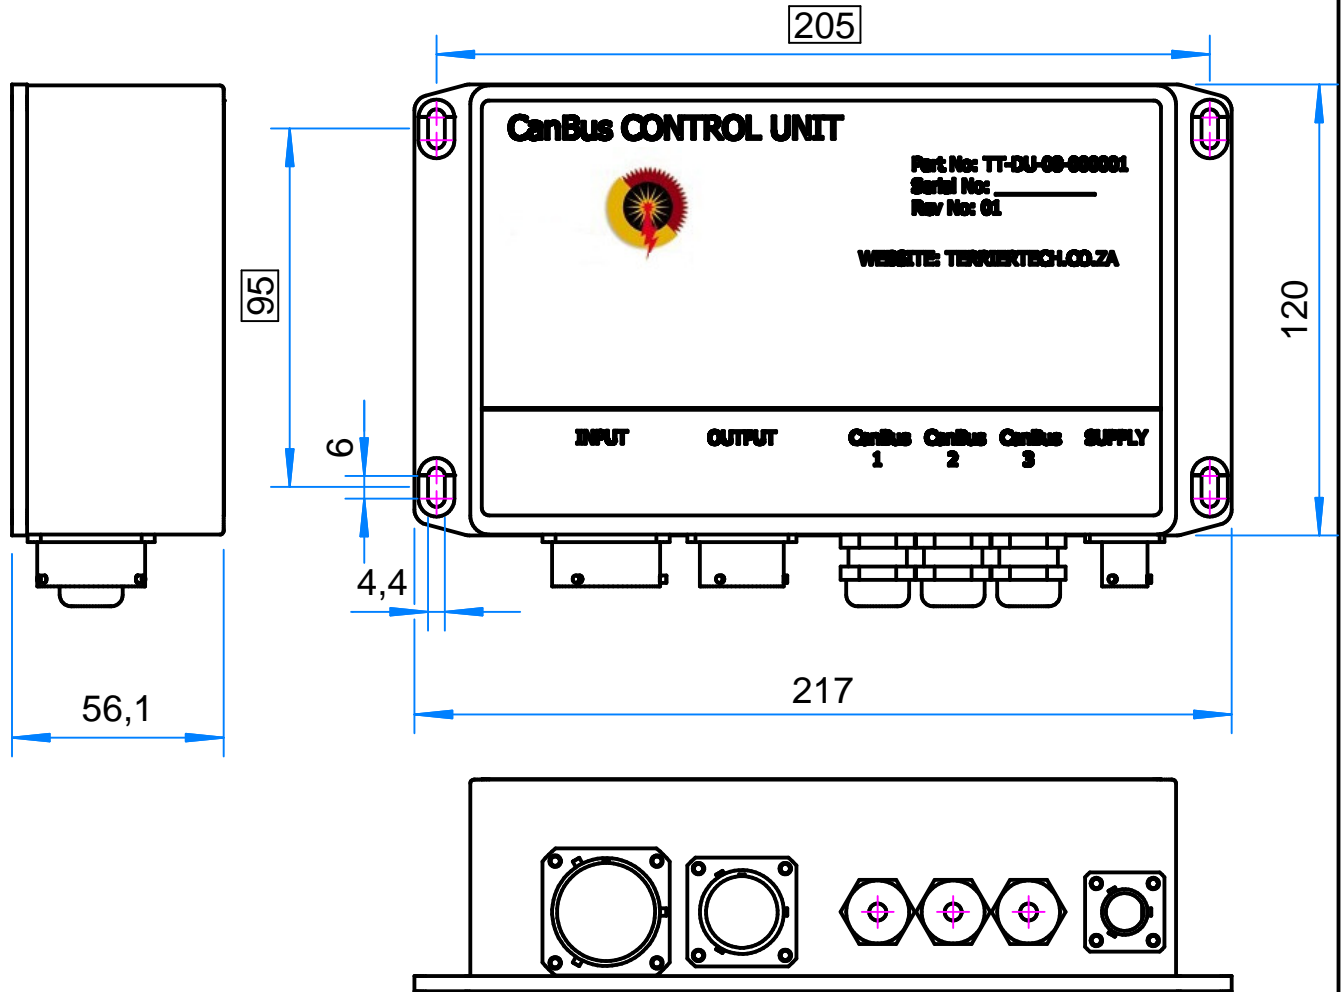

Technical Data

- * Environmental and EMC: to DEF Standards 00-35 part 3 and Def Standard 59-41 part 3.
- * Weight 700 grams
- * Connectors can be customized to customer specifications
- * Supply Voltage: 12 - 36V DC
- * 3 x CanBus interface connections:
 - 1 interface for Smart-Harness propriety protocol
 - 1 J1939 compatible interface
 - 1 diagnostic interface
- * Controller outputs: 16 output channels (0.6A each)
- * Controller inputs: 32 digital input channels
- * Output functionality fully programmable
- * Internal temperature sensor
- * Diagnostic capability
- * Software Configurable
- * Programmable load shedding via CanBus interface - Nodes
- * Current Limiting monitoring and measurement on each output of Nodes
- * Ordering detail TT-DU-08-00001

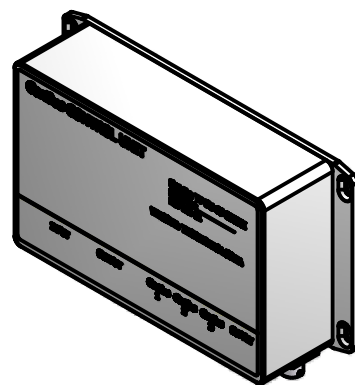

Contact details

Unit 14, Northlake
Industrial Park
Malcolm Moodie Crescent
Jet Park
Tel: +27 (0)11 397 6069
Fax: +27 (0) 11 397 8874

For more info please visit our website
www.terriertech.co.za