
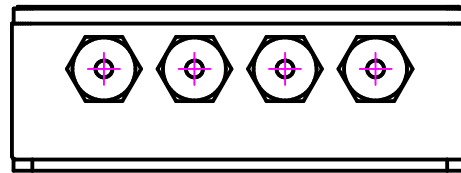
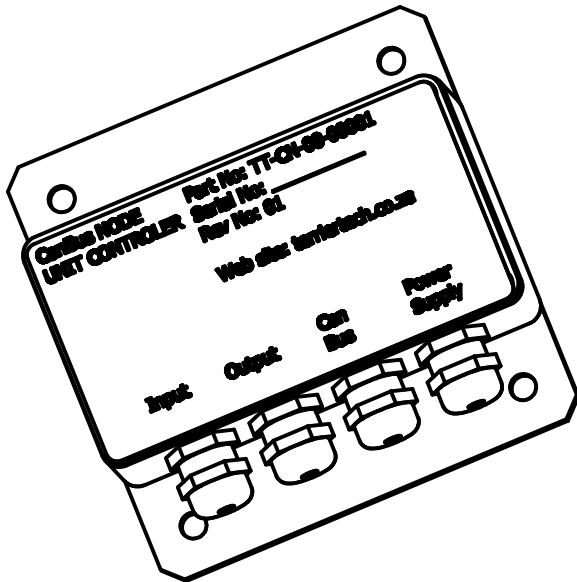


CanBus Node Control Unit (10A / 25A)

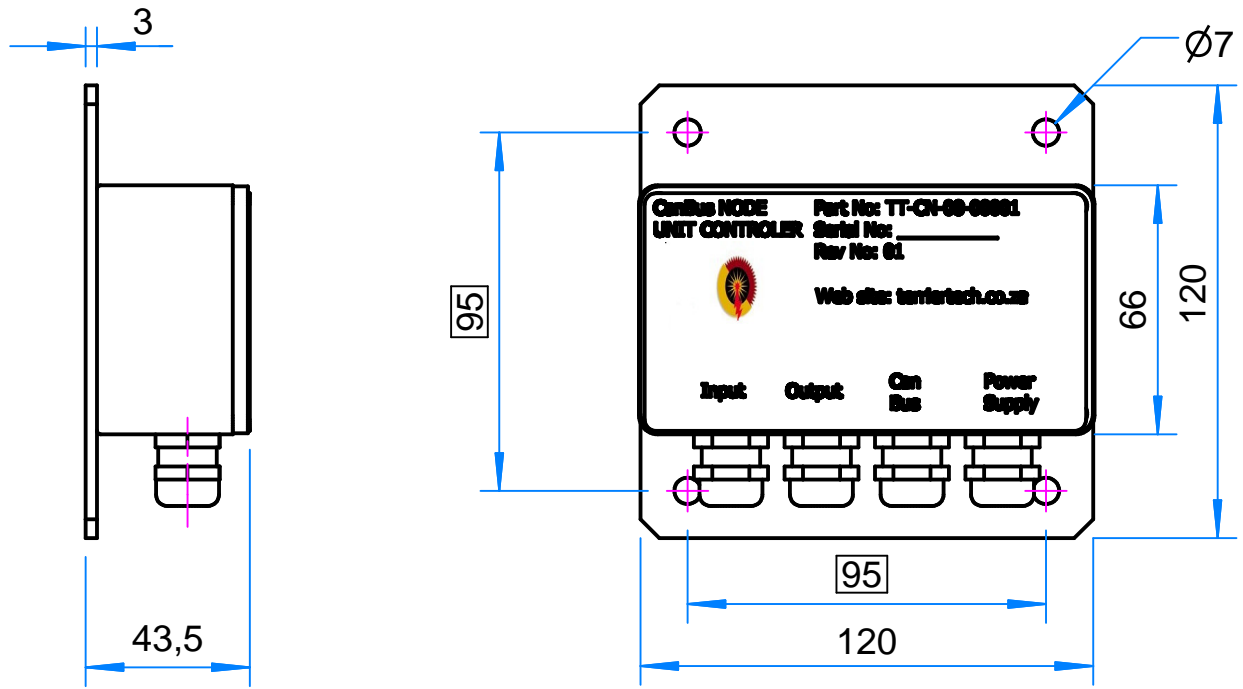

Technical Data

- * Environmental and EMC: to DEF Standards 00-35 part 3 and Def Standard 59-41 part 3.
- * Weight 300 grams
- * Connectors can be customized to customer specifications
- * Supply Voltage: 12 - 36V DC
- * Outputs 10A model: 8 output channels rated 10A each (Total module output limited to 40A)
- * Outputs 25A model: 4 output channels rated at 25A each. (Total module output limited to 40A)
- * Inputs 2 off; High or Low
- * Current monitoring on each output
- * Over current protection on each output (eliminating vehicle circuit breakers and relays)
- * Open circuit detection
- * 1x CanBus interface
- * Programmable load shedding
- * Input/Output functionality fully programmable
- * Internal temperature sensor
- * Ordering detail: for 10A = TT-CN-08-00001
for 25A = TT-CN-08-00002

Contact details

Unit 14, Northlake
Industrial Park
Malcolm Moodie Crescent
Jet Park
Tel: +27 (0)11 397 6069
Fax: +27 (0) 11 397 8874

For more info please visit our website

www.terriertech.co.za