


Power Management Distribution Box

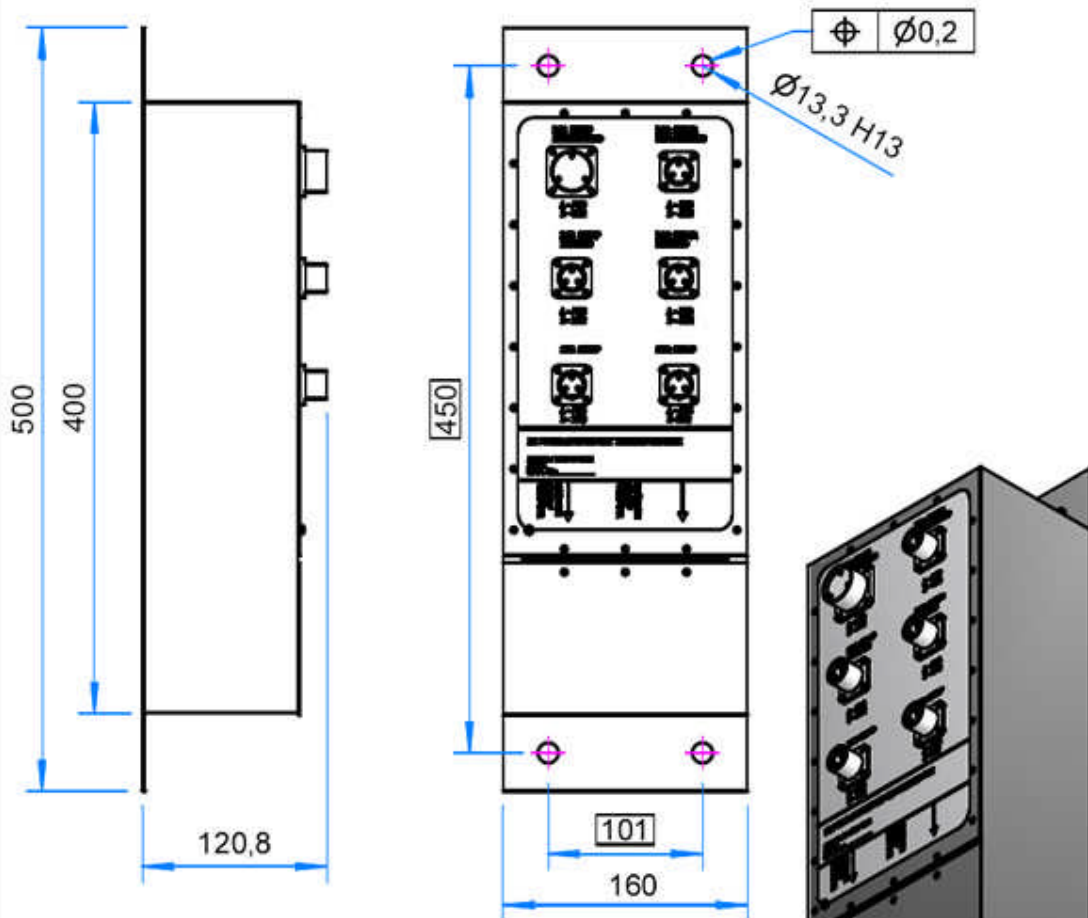

Technical Data

- * Environmental and EMC: to DEF Standards 00-35 part 3 and Def Standard 59-41 part 3 and Def Standard 61-5 part 6
- * Weight 7,5 kg
- * Supply Voltage: 24 - 36V DC
- * Programmable load shedding capability via CanBus interface
- * Current limiting and monitoring on each output
- * Current measurement facility on each output
- * Outputs:
 - * 1 x 24 VDC 30 A (not filtered)
 - * 1 x 24 VDC 15 A (not filtered)
 - * 2 x 24 VDC 15 A Filtered outputs that conform to MIL-STD 461E and complies to MIL-STD 1275
 - * 2 x 12 VDC 15 A Filtered outputs that conform to MIL-STD 461E and complies to MIL-STD 1275
 - * 1 x Easy accessible 24 VDC 30 A External bus bar with studs and holes for connecting external devices
- * Ordering detail TT-DB-08-00001

For more info please visit our website
www.terriertech.co.za

Contact details

Unit 14, Northlake
 Industrial Park
 Malcolm Moodie Crescent
 Jet Park
 Tel: +27 (0)11 397 6069
 Fax: +27 (0) 11 397 8874